DENIM WALL

FINAL PRODUCTION DRAWINGS TO BE COMMUNICATED WITH AND APPROVED BY GS PM

EXACT HEIGHT REQUIRED TO BE CHECKED ON SITE AND COMMUNICATED WITH GS PM POSSIBLE TO KEEP 100MM FREE OF CEILING

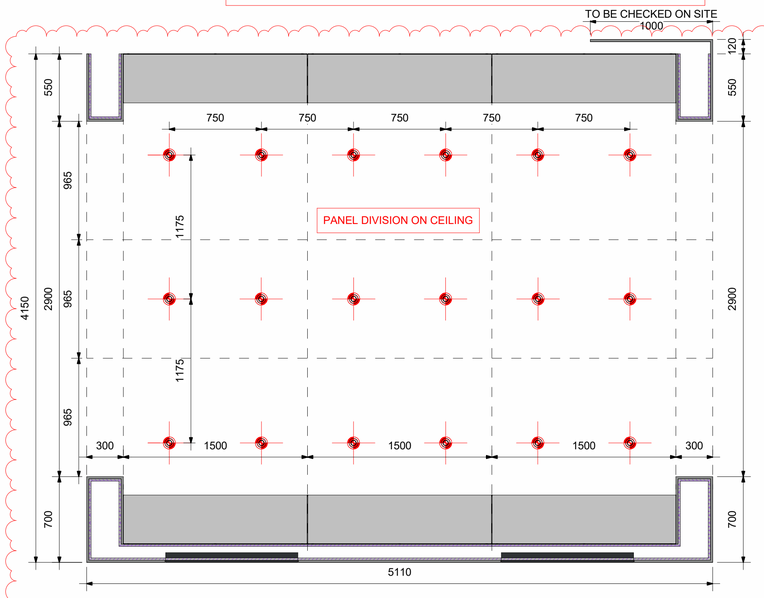

PLAN VIEW
SCALE 1 : 25

FINAL SCREEN DIMENSIONS TO BE CHECKED BY G-STAR VENDOR

SCREEN FLUSH WITH WALL (EXACT SIZE & HEIGHT TO BE CHECKED ON SITE AND COMMUNICATED WITH GS PM BEFORE PURCHASE AND INSTALLATION OF WALL) (ALL HARDWARE AT GS PREFERRED SUPPLIER) [SEE SHEET 1.6 - DETAIL 02]

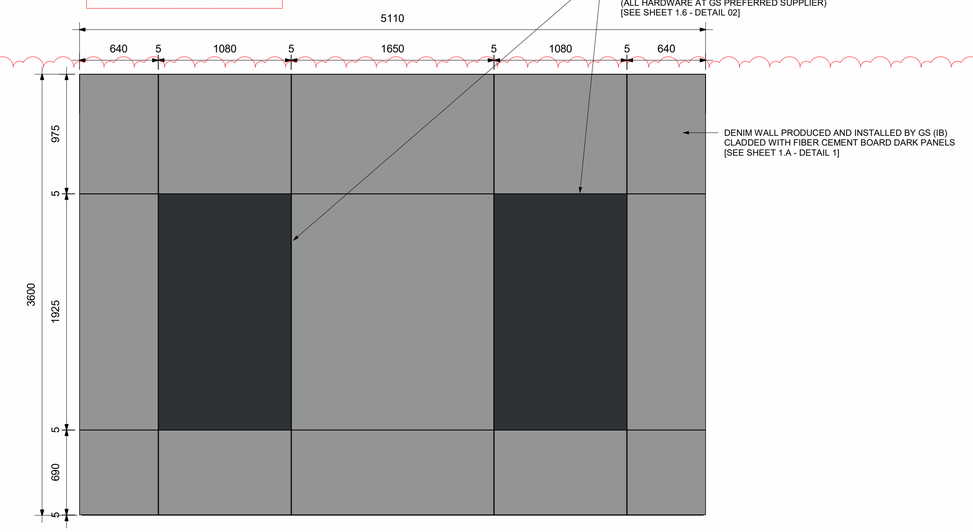

DENIM WALL PRODUCED AND INSTALLED BY GS (IB) CLADDED WITH FIBER CEMENT BOARD DARK PANELS [SEE SHEET 1.A - DETAIL 1]

ELEVATION
SCALE 1 : 25

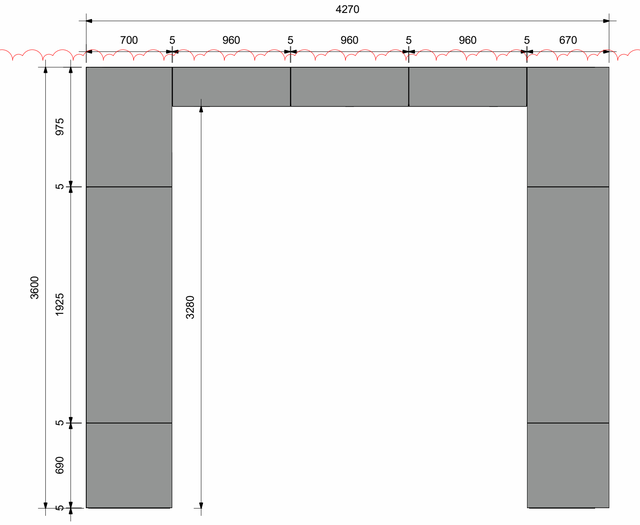

SIDE VIEW
SCALE 1 : 25

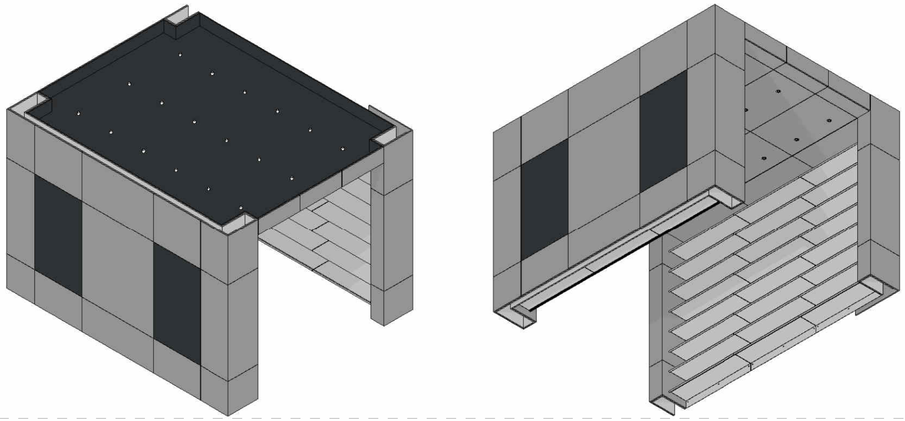

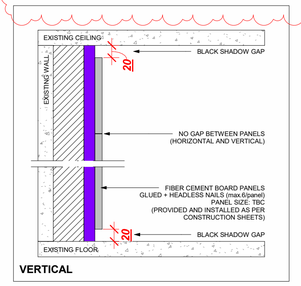

VERTICAL

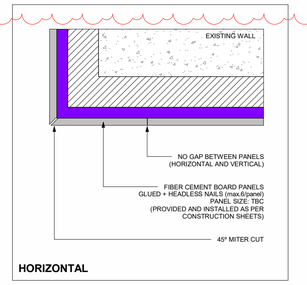

HORIZONTAL

DETAIL 01: FRAMEWORK + PLYWOOD + FIBER CEMENT BOARD
SCALE 1 : 5

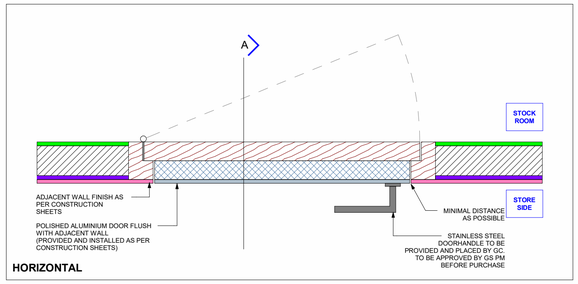

HORIZONTAL

ZIE BIJZONDERE VOORWAARDE(N)

GENERAL NOTES:

1. ABBREVIATIONS:
   GC: LOCAL GENERAL CONTRACTOR
   LPM: LOCAL PM
   GS: G-STAR

2. GC SHALL VERIFY ALL DIMENSIONS PRIOR TO COMMENCING WORK & NOTIFY GS OF ANY DISCREPANCIES OR OMISSIONS WHICH WOULD INTERFERE WITH THE SATISFACTORY COMPLETION OF THE WORK.

3. PRIOR TO THE START OF ANY WORK, GC SHALL FIELD VERIFY EXISTING CONDITIONS & INFORM GS OF ANY OMISSIONS OR DISCREPANCIES BETWEEN DRAWINGS & EXISTING CONDITIONS WHICH COULD INTERFERE WITH THE SATISFACTORY COMPLETION OF THE WORK.

4. GC IS RESPONSIBLE FOR CHECKING REINFORCEMENT OF WALLS, CEILING & FLOORS IS COMPLIANT PRIOR TO CONSTRUCTION. ADD EXTRA FURTHER REINFORCEMENT WHEN NECESSARY IN COORDINATION TO FINAL PROPOSED DESIGN.

DETAILS NOTE:

1. GS DESIGN IS LEADING

2. ALTERNATIVE SOLUTIONS MUST BE APPROVED BY GS

DETAIL LEGEND

- Existing Structure or Concrete
- Framework
- Plywood
- Plasterboard
- MDF
- Wood
- Facade finish

DIMENSION LEGEND

750 with margins

750 without margins & must be applied

ALL MEASUREMENTS TO BE CHECKED ON SITE
ALL DIMENSIONS IN MILLIMETERS
(UNLESS STATED OTHERWISE)

COPYRIGHT © G-STAR RAW C.V. 2024

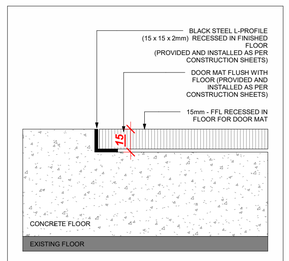

VERTICAL

DETAIL 02: DOORMAT
SCALE 1 : 2

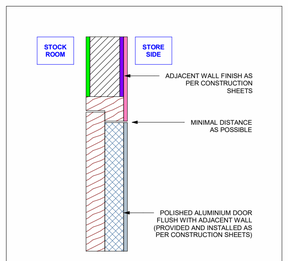

VERTICAL

POLISHED ALUMINIUM DOOR FLUSH WITH WALL - TOWARDS STOCK

- DOOR DIMENSIONS SPECIFIED IN FINAL DESIGN DRAWINGS (MUST COMPLY WITH LOCAL REGULATIONS).
- DOOR FLUSH WITH ADJACENT POLISHED ALUMINIUM WALL (OUTLINE PAINTED BLACK).
- GAP BETWEEN DOOR AND WALL AS SMALL AS POSSIBLE.
- FIXINGS ARRANGED LOCALLY (HIDDEN IF POSSIBLE).
- PRODUCTION DRAWINGS TO BE APPROVED BY G-STAR PRIOR TO CONSTRUCTION.
- GENERAL CONTRACTOR IS RESPONSIBLE TO SUPPLY:
  - DOOR
  - DOOR HANDLE OR PUSH/PULL PLATE
  - DOOR SPRING/CLOSER
  - LOCK SYSTEM (IF REQUIRED)
  - OTHER ITEMS SPECIFIED IN FINAL DESIGN DRAWINGS

'PANEL TO BE FIXED IN A SAFE WAY TO AVOID FALLING OFF FROM WALL WITH MOVEMENT OF THE DOOR'

DETAIL 03: DOOR FLUSH WITH WALL (OUT)
SCALE 1 : 10

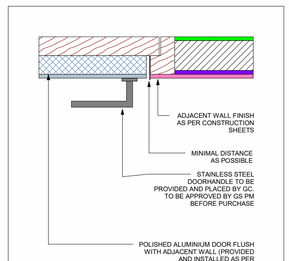

HORIZONTAL

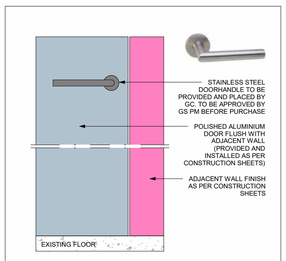

FRONT VIEW

DETAIL 04: STAINLESS STEEL DOOR HANDLE
SCALE 1 : 10

REVISION	DATE
Revision 4	02/09/2025
Revision 3	02/06/2025
Revision 2	21/05/2025
Revision 1	05/05/2025

G-STAR
Joan Muyskenweg 39
1114 AN Amsterdam

P.O. Box 12177
1100 AD Amsterdam, the Netherlands
Telephone: (+)31 (0)20 - 5677600

Country & city
Belgium, Gent

Project name & project number
Gent
MON04027

Sheet title
DETAILS

G-Star project manager
Frederik Tilman

G-Star architect
Gerdo Weltevreden
Triar BIM Projects

Sales surface area ground floor
134 m²

Date
02/09/2025

Sales surface area first floor
0 m²

Sales surface area basement floor
0 m²

Stock room
125 m²

Sheet size
A1

Sheet category & number / revision
1.A

REV. 4

\\sensitonProyectos\0_en proceso\Bimobs\2447_GENT_G-STAR\11 Modelos\250902 GENT_REV.4.rvt