
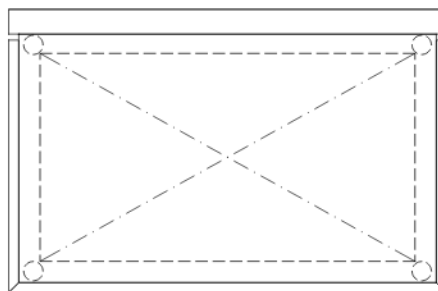


Twin Pass Through Utensil Washer with Drain Heat Recovery

UXTHR-10A

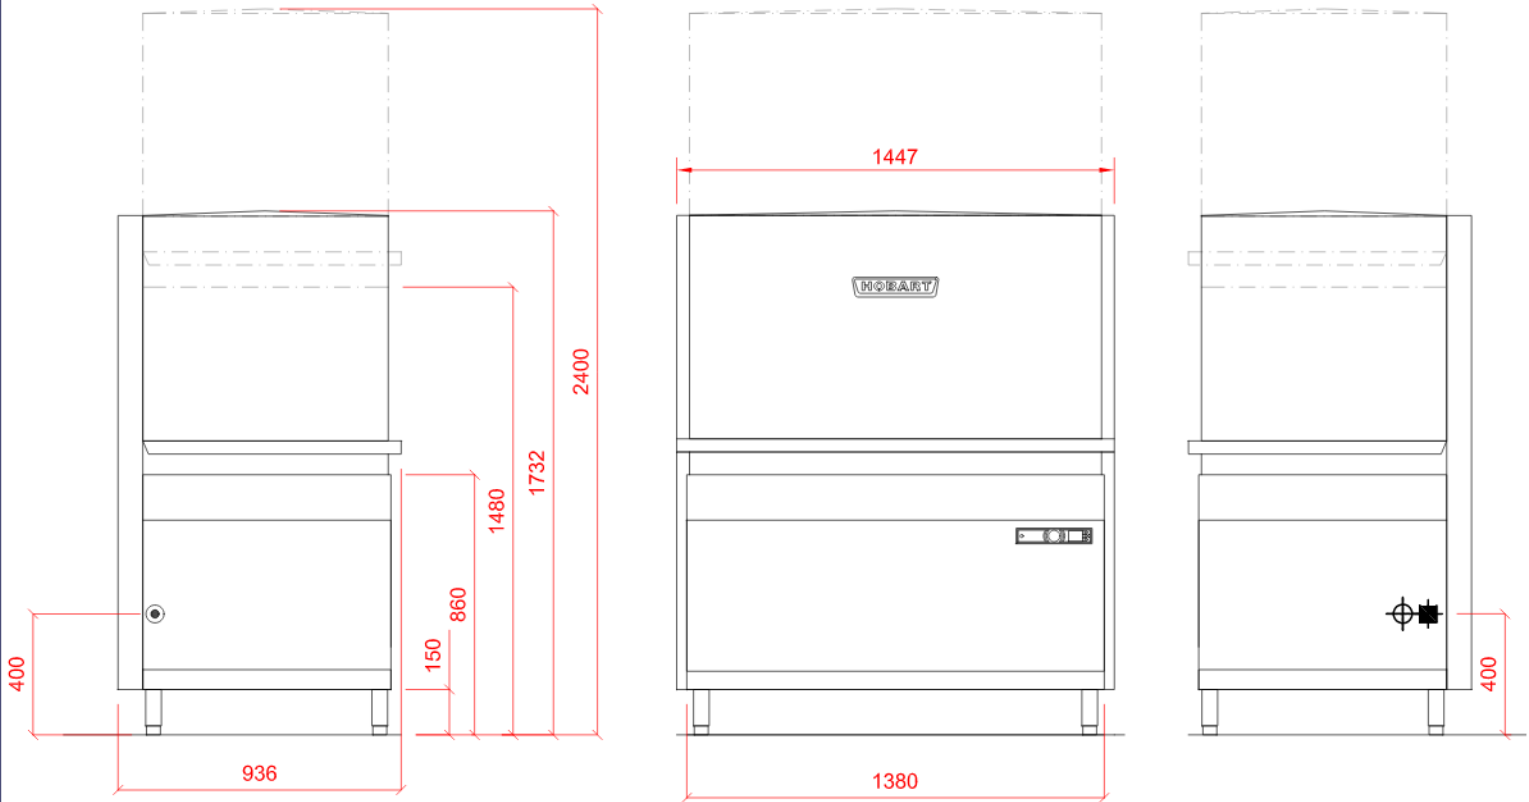

Plan View

1 Water

2 x 22mm CONNECTIONS EACH VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.  
**WATER SUPPLY 60°C TO 65°C** (2° TO 8° CLARK MAX) @ 0.5 TO 10 BAR MAX. INITIAL TANK FILL 130 LITRES. RINSE WATER USAGE 8.0 LITRES PER CYCLE. MAX USAGE 240 LITRES PER HOUR.  
**WATER SUPPLY UP TO 15°C** (2° TO 8° CLARK MAX) RINSE WATER USAGE 8.0 LITRES PER CYCLE.  
OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD. WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE.

2 Drain

DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 800mm A.F.F.L.  
  
FLOW RATE 30 LITRES PER MINUTE.

Other Services

3 Electric

**21.6kW** 400/50/3 + N + E FUSED AT **35amps**  
**CONFIGURABLE TO:**  
FOR WARM WATER SUPPLY  
**15.6kW** 400/50/3 + N + E FUSED AT **32amps**  
MACHINE SUPPLIED WITH 1.8 METRES OF CABLE.

Notes

APPROX WEIGHTS: EMPTY: 364kg's  
HEIGHTS MARKED \* REPRESENT ±25mm  
OPERATING HEIGHT FOR TABLE: 860mm